




Description	With TR-416 valve (0.453")	With TR-501 valve (0.625")	With TR-555 (9.7mm)	With TR-572 bent 31° (0.625")
Trailer TPMS kit with 2 sensors	1502-453	-	-	-
Trailer TPMS kit with 4 sensors	1504-416	1504-501	-	1504-572
Trailer TPMS kit with 6 sensors	1506-453	1506-501	1506-555	1506-572
Trailer TPMS kit with 8 sensors	1508-453	-	-	1508-572
Trailer TPMS kit with 10 sensors	1510-453	-	-	1510-572

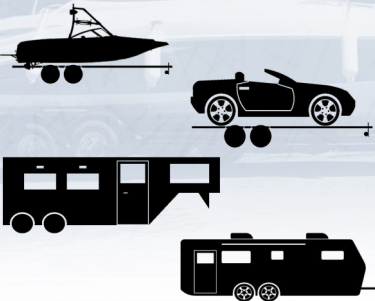

Transmitter Specs

- Weight: 1.25 oz. (35g)
- Dimensions: 0.59" x 2.50" x 1.11" (1.5 x 2.8 x 6.4 cm)
- Operating Temperature Range: -40°F to 257°F (-40°C to 125°C)
- Pressure Accuracy: ±2 psi (±0.14 Bar / ±14 kPa)
- Temperature Accuracy: ±5.4°F (±3°C)
- Battery life: 5 to 7 years
- Maximum Sensing Pressure: 188 psi (12.96 Bar / 1296 kPa)
- Maximum Cold Inflation Pressure: 144 psi (9.93 Bar / 993 kPa)
- High Temperature Warning (non-adjustable): 176°F (80°C)
- Frequency: 433.92 MHz



Peace of Mind ✓
 Fuel Savings ✓
 Extend Tire Life ✓

No need to relearn the sensors after a tire rotation. Move the sensor ID chips to their new positions and drive on!

